



## Step 1 - Wiring

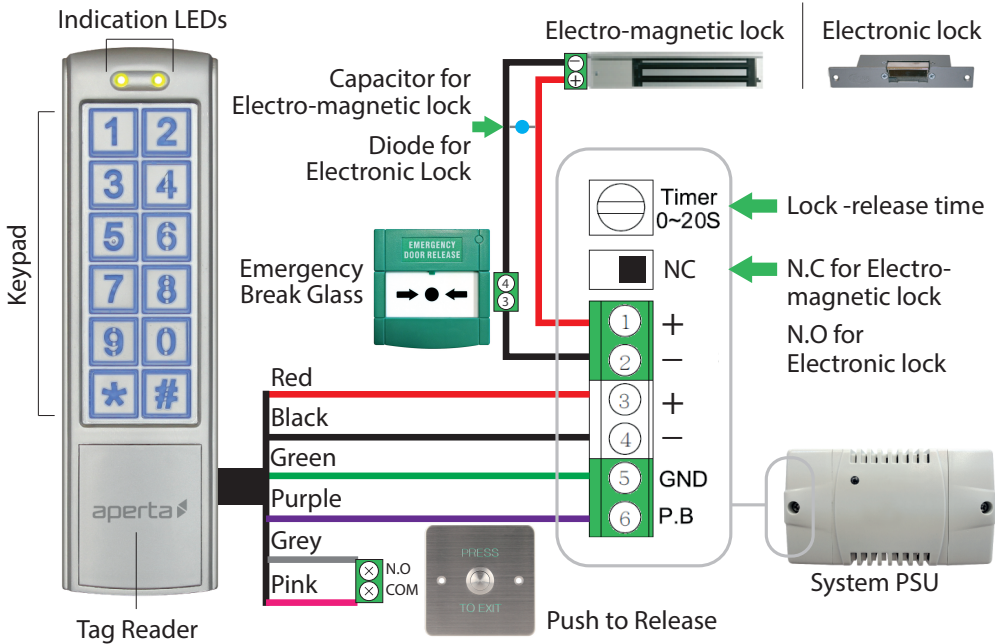

## Step 2 - Setting Access Pin Number


| Step Number | Action                                               | Keypad Indication |
|-------------|------------------------------------------------------|-------------------|
| 1           | 1 2 3 4 1 2 3 4                                      | Long Tone         |
| 2           | * 9                                                  |                   |
| 3           | 0 2                                                  | Long Tone         |
| 4           | 0 0 0                                                | Double Tone       |
| 5           | ? ? ? ? Enter a 4 digit pin<br>(1234 not to be used) | Long Tone         |
| 6           | # # To end programming                               |                   |

### Step 3 - Registering 10 Tags

| Step Number | Action                                                                                                                                                                                                                         | Keypad Indication                                                                           |
|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| 1           | 1 2 3 4 1 2 3 4                                                                                                                                                                                                                |  Long Tone |
| 2           | * 9                                                                                                                                                                                                                            |            |
| 3           | 0 5                                                                                                                                                                                                                            |  Long Tone |
| 4           | 0 0 1                                                                                                                                                                                                                          |  Long Tone |
| 5           | 0 1 0                                                                                                                                                                                                                          |  Tone      |
| 6           |  Present the tag with the lowest serial number                                                                                                |  Tone      |
| 7           | All other batch tags will auto register   To end programming |            |

### Step 4 - Release Lock

(A) Enter a programmed Access Pin number

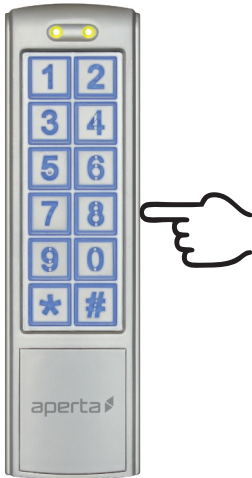

(B) Present a registered Tag

