

electrium



Miniature SPD
Overvoltage Protection
Device

MINIATURE SPD FOR SURGE PROTECTION IN DOMESTIC HOUSEHOLD PREMISES

SINGLE MODULE SPD

At just **18mm wide** this miniature SPD leaves more ways for household circuits and allows the most compact consumer unit to be used.

FULLY RATED 100A

No need for additional back up device in the consumer unit.

SIMPLE TO INSTALL

Connects directly onto the busbar (just like an MCB) supplied with Neutral and Earth cable connections.

LESS WIRING

Fewer cable links to connect than alternative products, which speeds up installation.

TYPE 2 SURGE PROTECTION

With status indicator and volt free contacts for remote monitoring and/or signalling.

SECURE CARTRIDGE ASSEMBLY

Cartridges are securely locked into place and cannot be removed for replacement without use of a tool.


CERTIFIED AS FULLY COMPLIANT

Wylex single module SPDs are designed, manufactured & tested to IEC EN61643-11 and certified as compliant.

RETROFIT COMPATIBLE


Fits metal NM & insulated NH consumer units* (includes a balcony busbar connection). Supplied with a retrofit circuit icons label pack.

* Not suitable for Dual RCD configurations

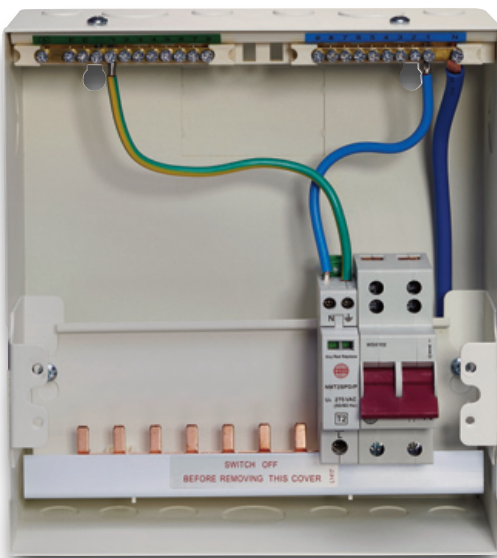



Surge Protection Devices



NMT2SPD3W/1



NMT2SPD/P

SURGE PROTECTION DEVICE

CAT REF	DESCRIPTION
NMT2SPD3W/1	Single Module Type 2 SPD

- Suitable for all Single Phase 3 Wire Systems TN-C-S, TN-S and TT
- Clear Indication of device status
- Fitted with remote signalling contact
- Suitable for use in Main Switch, Split Load & Hi-Integrity consumer unit configurations
- Not suitable for Dual RCD configurations

Alternative SPD products are available for Dual RCD consumer unit installations. Please contact Wylex technical for further assistance.

REPLACEMENT PLUG-IN CARTRIDGE

CAT REF	DESCRIPTION
NMT2SPD/P	Replacement Plug-in Cartridge for NMT2SPD3W/1

- Combined Metal Oxide Varistor (L1 & N) and Gas Discharge Tube (N & E)

TECHNICAL DATA

Product Standard	IEC EN 61643-11
Nominal discharge surge current (8/20) μs	20kA
Short-circuit breaking capacity (I_{sc}cr)	25kA
Max. continuous voltage AC	275V
Max. discharge surge current (8/20) μs	40kA
Voltage protection level	1.3 kV
Voltage protection level L-N	1.3 kV
Voltage protection level N-PE	1.3 kV
Max. conductor cross section (solid / stranded)	25mm ²
Degree of protection	IP20
Dimensions	Height 85mm x Width 18mm x Depth 70mm

electrium

ELECTRIUM SALES LIMITED A SIEMENS COMPANY

Commercial Centre, Lakeside Plaza,
Walkmill Lane, Bridgtown,
Cannock WS11 0XE.
eMail: info@electrium.co.uk

www.electrium.co.uk

UK SALES

Telephone: 01543 455020
Facsimile: 01543 455021
eMail: wylex.sales@electrium.co.uk

TECHNICAL

Telephone: 01543 438320
Facsimile: 01543 438321
eMail: wylex.technical@electrium.co.uk

EXPORT SALES

Telephone: +44 1543 455049
Facsimile: +44 1543 455048
eMail: export@electrium.co.uk

DUBAI OFFICE

Telephone: +971 4 3660684
Facsimile: +971 4 3660676
eMail: export@electrium.co.uk



[@ElectriumNews](https://twitter.com/ElectriumNews) or download the APP

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Users should always consult the installations instructions, IET wiring regulations and all other relevant documents, and not solely rely on information in this catalogue.

Publication No. WY2604 03/2021

#63

Surge Protection - safeguarding your data and productivity.



#95

We provide product solutions that help you comply with the wiring regulations.



#14

Cutting edge Siemens technology inside.



#26

We have the widest range for installers and specifiers.



#34

Overvoltage protection. We've been doing it for years.

